

7/8系列 7/8 SERIE

产品符合IEC 61076-2-101 工业4.0协议, NEMA2000标准
Products comply with IEC 61076-2-101 Industry 4.0 Agreement NEMA2000 standard

插头: 组装式, 注塑带电缆式 (长度可任意定制)
Plug: assembly, overmolded cable type (length can be customized at will)

插座: 板前安装、板后安装焊线及PCB板式
Socket: Front Mount Solder Type, Back Mount Solder Type and PCB board type

主要用于电源连接器
Mainly used in power connectors




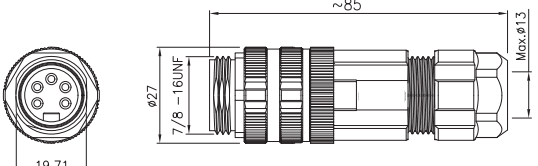

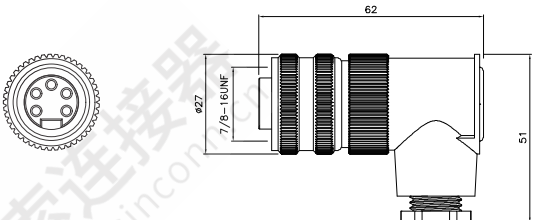

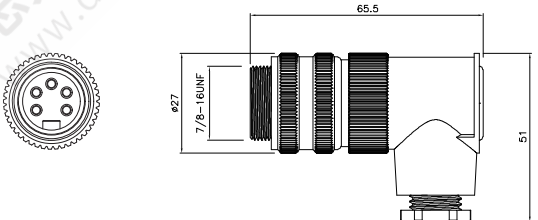

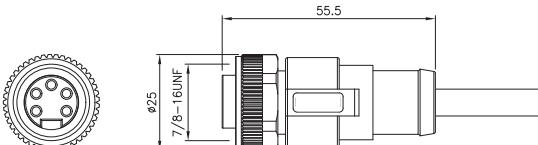

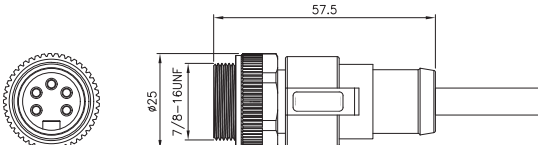

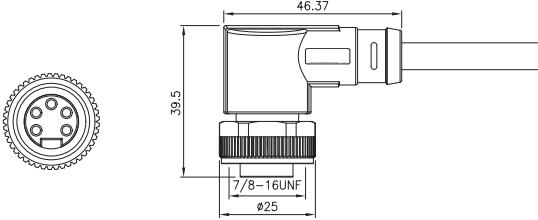
产品芯数: 3~6芯
Pins Number: 3-6 pins


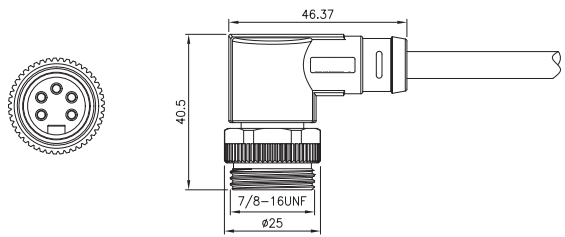

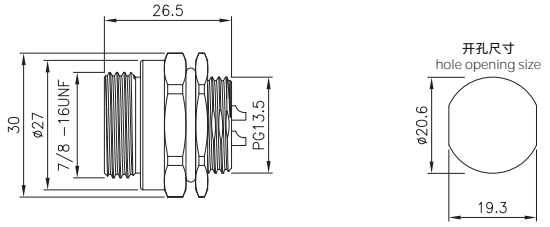

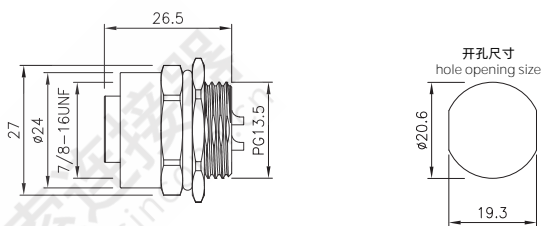

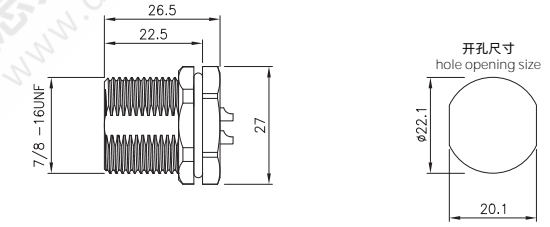

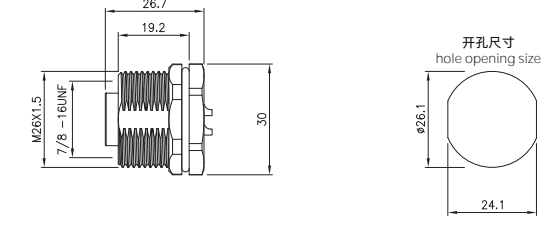

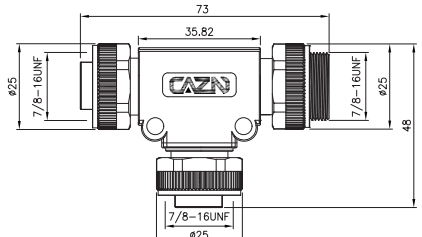
防水等级: IP65、IP67
Waterproof grade: Ip65、IP67











产品参数 PRODUCT PARAMETERS

壳体材料 Shell material	黄铜镀镍/锌合金度镍/PA+GF Brass nickel-plated/Zinc alloy nickel-plated/PA-GF	接触阻抗 Contact impedance	≤5mΩ
密封材料 Sealing material	环氧树脂/橡胶 Epoxy resin/Rubber	插拔次数 Durability	≥500次(Cycles)
插针材料 Contact material	黄铜/磷铜镀金 Brass/Phosphorus copper gold-plated	绝缘阻抗 Insulation impedance	≥100mΩ
胶芯材料 Insulator material	PA+GF/TPU	适用温度 Applicable temperature	-25°C ~ +80°C
成型材料 Molding material	TPU/PVC		
















产品图 PRODUCT FIGURE	名称/类型号 NAME/TYPE No.	尺寸图 DIMENSIONS
	<p>7/8直式孔型塑胶插头 螺钉式 7/8 Straight Female Plastic Plug (Screw)</p> <p>78-0001-05 0 0 00000</p> <p>PG7: 78-0001 PG9: 78-0002</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>~80</p> <p>Max. $\phi 13$</p> <p>$\phi 27$</p> <p>7/8-16UNF</p>
	<p>7/8直式针型塑胶插头 螺钉式 7/8 Straight Male Plastic Plug (Screw)</p> <p>78-0003-05 0 0 00000</p> <p>PG7: 78-0003 PG9: 78-0004</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>~85</p> <p>Max. $\phi 13$</p> <p>$\phi 27$</p> <p>7/8-16UNF</p> <p>19.71</p>
	<p>7/8弯式孔型塑胶插头 螺钉式 7/8 Angled Female Plastic Plug (Screw)</p> <p>78-0005-05 0 0 00000</p> <p>PG7: 78-0005 PG9: 78-0006</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>62</p> <p>51</p> <p>$\phi 27$</p> <p>7/8-16UNF</p>
	<p>7/8弯式针型塑胶插头 螺钉式 7/8 Angled Male Plastic Plug (Screw)</p> <p>78-0007-05 0 0 00000</p> <p>PG7: 78-0007 PG9: 78-0008</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>65.5</p> <p>51</p> <p>$\phi 27$</p> <p>7/8-16UNF</p>
<p>非屏蔽款/Unshielded 屏蔽款/Shielded</p> 	<p>7/8直式孔型成型插头 7/8 Straight Female overmolded plug</p> <p>78-0009-05 0 0 00000</p> <p>UNS: 78-0009 SHD: 78-0010</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>55.5</p> <p>$\phi 25$</p> <p>7/8-16UNF</p>
<p>非屏蔽款/Unshielded 屏蔽款/Shielded</p> 	<p>7/8直式针型成型插头 7/8 Straight Male overmolded plug</p> <p>78-0011-05 0 0 00000</p> <p>UNS: 78-0011 SHD: 78-0012</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>57.5</p> <p>$\phi 25$</p> <p>7/8-16UNF</p>
<p>非屏蔽款/Unshielded 屏蔽款/Shielded</p> 	<p>7/8弯式孔型成型插头 7/8 Angled Female overmolded plug</p> <p>78-0013-05 0 0 00000</p> <p>UNS: 78-0013 SHD: 78-0014</p> <p>3 4 5 6</p> <p>1-PVC 2-PUR 3-TPU 4-RU 5-PTFE</p> <p>L (mm)</p>	 <p>46.37</p> <p>39.5</p> <p>$\phi 25$</p> <p>7/8-16UNF</p>

产品图 PRODUCT FIGURE	名称/型号 NAME/TYPE No.	尺寸图 DIMENSIONS
非屏蔽款/Unshielded 屏蔽款/Shielded 	7/8弯式针型成型插头 7/8 Angled Male overmolded plug 78-0015-05 0 0 00000 UNS: 78-0015 SHD: 78-0016 3 4 5 6 1-PVC 2-PUR 3-TPU 4-RU 5-PTFE L (mm)	
	7/8板前安装针型插座 焊接式 螺母PG13.5 7/8 Male Back Fastened Socket (Solder, Screw PG13.5) 78-0017-04 0 0 00000 No. 78-0017 3 4 5 6 1-PVC 2-PUR 3-TPU 4-RU 5-PTFE L (mm)	
	7/8板前安装孔型插座 焊接式 螺母PG13.5 7/8 Female Back Fastened Socket (Solder, Screw PG13.5) 78-0018-04 0 0 00000 No. 78-0018 3 4 5 6 1-PVC 2-PUR 3-TPU 4-RU 5-PTFE L (mm)	
	7/8板后安装针型插座 焊接式 螺母7/8-16UHF 7/8 Male Front Fastened Socket (Solder, Screw 7/8-16UHF) 78-0019-04 0 0 00000 No. 78-0019 3 4 5 6 1-PVC 2-PUR 3-TPU 4-RU 5-PTFE L (mm)	
	7/8板后安装孔型插座 焊接式 螺母M25x1.5 7/8 Female Front Fastened Socket (Solder, Screw M25*1.5) 78-0020-04 0 0 00000 No. 78-0020 3 4 5 6 1-PVC 2-PUR 3-TPU 4-RU 5-PTFE L (mm)	
	7/8 T型插头 PSS型 7/8 T Type Adapter (PSS) 78-0021-05 0 0 00000 No. 78-0021 3 4 5 6 1-PVC 2-PUR 3-TPU 4-RU 5-PTFE L (mm)	

7/8·电气参数 7/8 ELECTRICAL PARAMETERS

芯数 Pins	针型 Male	额定电流 Rated current	额定电压 Rated voltage		导体规格 Conductor size		孔型 Female
			A/C	D/C	AWG	mm ²	
3		13A	300V	300V	18	1	
4		9A	300V	300V	18	1	
5		9A	300V	300V	20	0.5	
6		9A	300V	300V	20	0.5	

7/8·接线定义 7/8 WIRE DEFINITION

芯位 Pins	线芯颜色 Wire core color		芯位 Pins	线芯颜色 Wire core color		芯位 Pins	线芯颜色 Wire core color	
3芯(Pins)								
1	BK		1	BK		1	BK	
2	BN		2	BU		2	BU	
3	BU		3	BN		3	GNYE	
4	-		4	WH		4	BN	
5	-		5	-		5	WH	

*接线定义按常规标准，如按协议或者其他请联系我司业务。

Wiring definition according to conventional standards, if according to the agreement or other please contact our sales.

业务咨询: 185-1876-5758 EMAIL: kaikai@dosin.cn 售后咨询: 400-6263-698